

**SFP-10GB-DW20-100-I-N1-C**

Alcatel-Lucent Nokia® Compatible TAA 10GBase-DWDM SFP+ Transceiver C-Band 100GHz (SMF, 1561.42nm, 100km, LC, DOM, -40 to 85C)

**Features:**

- SFF-8432 and SFF-8472 Compliance
- Duplex LC Connector
- Temperature-stabilized EML transmitter and APD receiver
- Single-mode Fiber
- Industrial Temperature -40 to 85 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free

**Applications:**

- 10x Gigabit Ethernet over DWDM
- 8x/10x Fibre Channel
- Access, Metro and Enterprise

**Product Description**

This Alcatel-Lucent Nokia® compatible SFP+ transceiver provides 10GBase-DWDM throughput up to 100km over single-mode fiber (SMF) using a wavelength of 1561.42nm via an LC connector. It can operate at temperatures between -40 and 85C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Alcatel-Lucent Nokia®. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLabs' transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products.")



### Wavelength Guide (100GHz ITU-T Channel)

| Channel # | Frequency (THz) | Center Wavelength (nm) |
|-----------|-----------------|------------------------|
| 19        | 191.9           | 1562.23                |
| 20        | 192.0           | 1561.42                |
| 21        | 192.1           | 1560.61                |
| 22        | 192.2           | 1559.79                |
| 23        | 192.3           | 1558.98                |
| 24        | 192.4           | 1558.17                |
| 25        | 192.5           | 1557.36                |
| 26        | 192.6           | 1556.55                |
| 27        | 192.7           | 1555.75                |
| 28        | 192.8           | 1554.94                |
| 29        | 192.9           | 1554.13                |
| 30        | 193.0           | 1553.33                |
| 31        | 193.1           | 1552.52                |
| 33        | 193.3           | 1551.72                |
| 34        | 193.4           | 1550.12                |
| 35        | 193.5           | 1549.32                |
| 36        | 193.6           | 1548.51                |
| 37        | 193.7           | 1547.72                |
| 38        | 193.8           | 1546.92                |
| 39        | 193.9           | 1546.12                |
| 40        | 194.0           | 1545.32                |
| 41        | 194.1           | 1544.53                |
| 42        | 194.2           | 1543.73                |
| 43        | 194.3           | 1542.94                |
| 44        | 194.4           | 1542.14                |
| 45        | 194.5           | 1541.35                |
| 46        | 194.6           | 1540.56                |
| 47        | 194.7           | 1539.77                |
| 48        | 194.8           | 1538.98                |
| 49        | 194.9           | 1538.19                |
| 50        | 195.0           | 1537.40                |
| 51        | 195.1           | 1536.61                |
| 52        | 195.2           | 1535.82                |
| 53        | 195.3           | 1535.04                |
| 54        | 195.4           | 1534.25                |
| 55        | 195.5           | 1533.47                |
| 56        | 195.6           | 1532.68                |
| 57        | 195.7           | 1531.90                |
| 58        | 195.8           | 1531.12                |
| 59        | 195.9           | 1530.33                |

|    |       |         |
|----|-------|---------|
| 60 | 196.0 | 1529.55 |
| 61 | 196.1 | 1528.77 |

### Absolute Maximum Ratings

| Parameter                  | Symbol           | Min. | Typ.    | Max. | Unit |
|----------------------------|------------------|------|---------|------|------|
| Storage Temperature        | T <sub>STG</sub> | -40  |         | 85   | °C   |
| Operating Case Temperature | T <sub>C</sub>   | -40  | 25      | 85   | °C   |
| Supply Voltage             | V <sub>CC</sub>  | -0.5 |         | 4.0  | V    |
| Relative Humidity          | RH               | 5    |         | 95   | %    |
| Data Rate                  |                  |      | 10.3125 |      | Gbps |

### Electrical Characteristics

| Parameter                            | Symbol                       | Min.            | Typ. | Max.  | Unit                 | Notes |
|--------------------------------------|------------------------------|-----------------|------|-------|----------------------|-------|
| Supply Voltage                       | V <sub>CC</sub>              | 3.135           | 3.3  | 3.465 | V                    |       |
| Module Supply Current                | I <sub>CC</sub>              |                 |      | 550   | mA                   |       |
| Power Dissipation                    | P <sub>DISS</sub>            |                 |      | 1.8   | W                    |       |
| <b>Transmitter</b>                   |                              |                 |      |       |                      |       |
| <b>Input Differential Impedance</b>  | Z <sub>IN</sub>              |                 | 100  |       | Ω                    |       |
| Differential Data Input Swing        | V <sub>IN,pp</sub>           | 180             |      | 700   | mVp-p                |       |
| Tx_Fault                             | Transmitter Fault            | V <sub>OH</sub> | 2.0  |       | Host_V <sub>CC</sub> | V     |
|                                      | Normal Operation             | V <sub>OL</sub> | 0    |       | 0.8                  | V     |
| Tx_Disable                           | Transmitter Disable          | V <sub>IH</sub> | 2.0  |       | Host_V <sub>CC</sub> | V     |
|                                      | Transmitter Enable           | V <sub>IL</sub> | 0    |       | 0.8                  | V     |
| <b>Receiver</b>                      |                              |                 |      |       |                      |       |
| <b>Output Differential Impedance</b> | Z <sub>OUT</sub>             |                 | 100  |       | Ω                    |       |
| Differential Data Output Swing       | V <sub>OUT,pp</sub>          | 300             |      | 850   | mVp-p                | 1     |
| Data Output Rise/Fall Time           | T <sub>r/T<sub>f</sub></sub> | 28              |      |       | ps                   | 2     |
| Rx_LOS                               | Loss of Signal (LOS)         | V <sub>OH</sub> | 2.0  |       | Host_V <sub>CC</sub> | V     |
|                                      | Normal Operation             | V <sub>OL</sub> | 0    |       | 0.8                  | V     |

### Notes:

1. Internally AC coupled but requires an external 100Ω differential load termination.
2. 20–80%.
3. LOS is an open collector output that should be pulled up with 4.7kΩ on the host board.

## Optical Characteristics

| Parameter                                     | Symbol  | Min.    | Typ. | Max.    | Unit  | Notes |
|---|---|---------|------|---------|-------|-------|
| <b>Transmitter</b>                            |   |         |      |         |       |       |
| <b>Launch Optical Power</b>                   | P <sub>o</sub>  | +1.0    |      | +4.0    | dBm   | 1     |
| <b>Center Wavelength Range</b>                | λ <sub>C</sub>  | 1528.77 |      | 1562.23 | nm    |       |
| <b>Center Wavelength Spacing</b>              |   |         | 100  |         | GHz   |       |
| <b>Center Wavelength Tolerance</b>            | Δλ <sub>C</sub>   | -100    |      | 100     | pm    |       |
| <b>Extinction Ratio</b>                       | ER  | 9.0     |      |         | dB    | 2     |
| <b>Side-Mode Suppression Ratio</b>            | SMSR  | 30      |      |         | dB    |       |
| <b>Spectral Width ( -20dB )</b>               |   |         |      | 1       | nm    |       |
| <b>Transmitter and Dispersion Penalty</b>     | TDP   |         |      | 4.0     | dB    |       |
| <b>Relative Intensity Noise</b>               | RIN   |         |      | -128    | dB/Hz |       |
| <b>Optical Return Loss Tolerance</b>          | ORLT  |         |      | 21      | dB    |       |
| <b>Pout @Tx_Disable Asserted</b>              | P <sub>off</sub>  |         |      | -30     | dBm   | 1     |
| <b>Eye Diagram</b>                            | IEEE Std 802.3-2005 10Gb Ethernet 10GBASE-ZR Compatible |         |      |         |       |       |
| <b>Receiver</b>                               |   |         |      |         |       |       |
| <b>Center Wavelength</b>                      | λ <sub>C</sub>  | 1528    |      | 1565    | nm    |       |
| <b>Receiver Sensitivity (P<sub>avg</sub>)</b> | S   |         |      | -26     | dBm   | 3     |
| <b>Receiver Overload (P<sub>avg</sub>)</b>    | P <sub>OL</sub>   | -7.0    |      |         | dBm   | 3     |
| <b>Optical Return Loss</b>                    | ORL   |         |      | -27     | dB    |       |
| <b>OSNR</b>                                   |   | 27      |      |         | dB    | 4     |
| <b>Maximum OSNR Path Penalty</b>              |   |         |      | 4       | dB    | 4     |
| <b>Dispersion Limited Distance</b>            |   |         |      | 100     | km    |       |
| <b>LOS De-Assert</b>                          | LOSD  |         |      | -26     | dBm   |       |
| <b>LOS Assert</b>                             | LOSA  | -35     |      |         | dBm   |       |
| <b>LOS Hysteresis</b>                         |   | 0.5     |      |         | dB    |       |

### Notes:


1. The optical power is launched into 9/125μm SMF.
2. Measured with a PRBS 2<sup>31</sup>-1 test pattern @10.3125Gbps.
3. Measured with PRBS 2<sup>31</sup>-1 test pattern, @10.3125Gbps, and BER<10<sup>-12</sup>.
4. Receiver power @-7~-18dBm, @10.3125Gbps, and BER<10<sup>-12</sup>.

## Pin Descriptions

| Pin | Symbol     | Name/Description  | Notes |
|-----|------------|---|-------|
| 1   | VeeT       | Transmitter Ground (Common with Receiver Ground).                         | 1     |
| 2   | Tx_Fault   | Transmitter Fault. LVTTL-O.   | 2     |
| 3   | Tx_Disable | Transmitter Disable. Laser output disabled on “high” or “open.” LVTTI-I.  | 3     |
| 4   | SDA        | 2-Wire Serial Interface Data (Same as MOD-DEF2 in INF-8074i). LVTTL-I/O.  |       |
| 5   | SCL        | 2-Wire Serial Interface Clock (Same as MOD-DEF2 in INF-8074i). LVTTL-I.   |       |
| 6   | MOD_ABS    | Module Absent. Connect to the VeeT or VeeR in the module.                 | 4     |
| 7   | RS0        | Rate Select 0. Not Used.  | 5     |
| 8   | LOS        | Loss of Signal Indication. “Logic 0” indicates normal operation. LVTTL-O. | 2     |
| 9   | RS1        | Rate Select 1. Not Used.  | 5     |
| 10  | VeeR       | Receiver Ground (Common with Transmitter Ground).                         | 1     |
| 11  | VeeR       | Receiver Ground (Common with Transmitter Ground).                         | 1     |
| 12  | RD-        | Receiver Inverted Data Out. AC Coupled. CML-O.                            |       |
| 13  | RD+        | Receiver Non-Inverted Data Out. AC Coupled. CML-O.                        |       |
| 14  | VeeR       | Receiver Ground (Common with Transmitter Ground).                         | 1     |
| 15  | VccR       | Receiver Power Supply.  |       |
| 16  | VccT       | Transmitter Power Supply.   |       |
| 17  | VeeT       | Transmitter Ground (Common with Receiver Ground).                         | 1     |
| 18  | TD+        | Transmitter Non-Inverted Data In. AC Coupled. CML-I.                      |       |
| 19  | TD-        | Transmitter Inverted Data In. AC Coupled. CML-O.                          |       |
| 20  | VeeT       | Transmitter Ground (Common with Receiver Ground).                         | 1     |


## Notes:

1. The module signal ground contacts, VeeR and VeeT, should be isolated from the module case.
2. This contact is an open collector/drain output and should be pulled up to the Host\_Vcc with resistor in the range 4.7kΩ to 10kΩ. Pull-ups can be connected to one or several power supplies; however, the hostboard design shall ensure that no module contact has voltage exceeding module VccT/R+0.5V.
3. Tx\_Disable is an input contact with a 4.7kΩ to 10kΩ pull-up resistor to VccT inside the module.
4. MOD\_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull the contact up to Host\_Vcc with a resistor in the range from 4.7kΩ to 10kΩ. MOD\_ABS is asserted “high” when the SFP+ module is physically absent from a host slot.
5. Internally pulled down per SFF-8431.

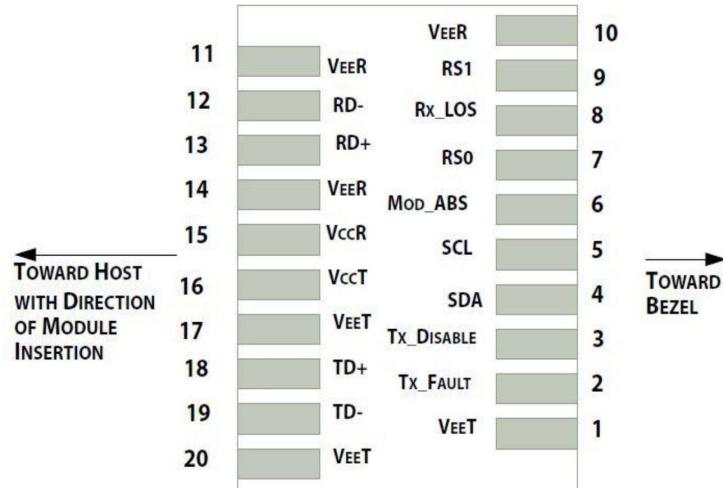


Pin-Out of Connector Block on the Host Board

### Recommended Application Interface Block Diagram

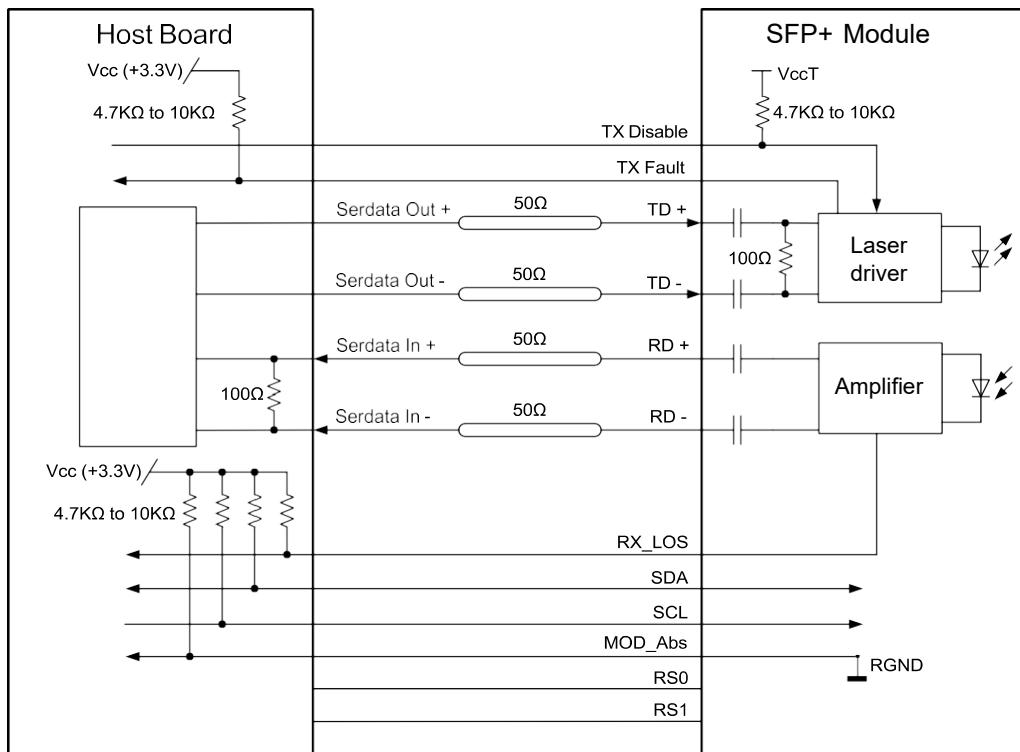

## Mechanical Specifications

Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

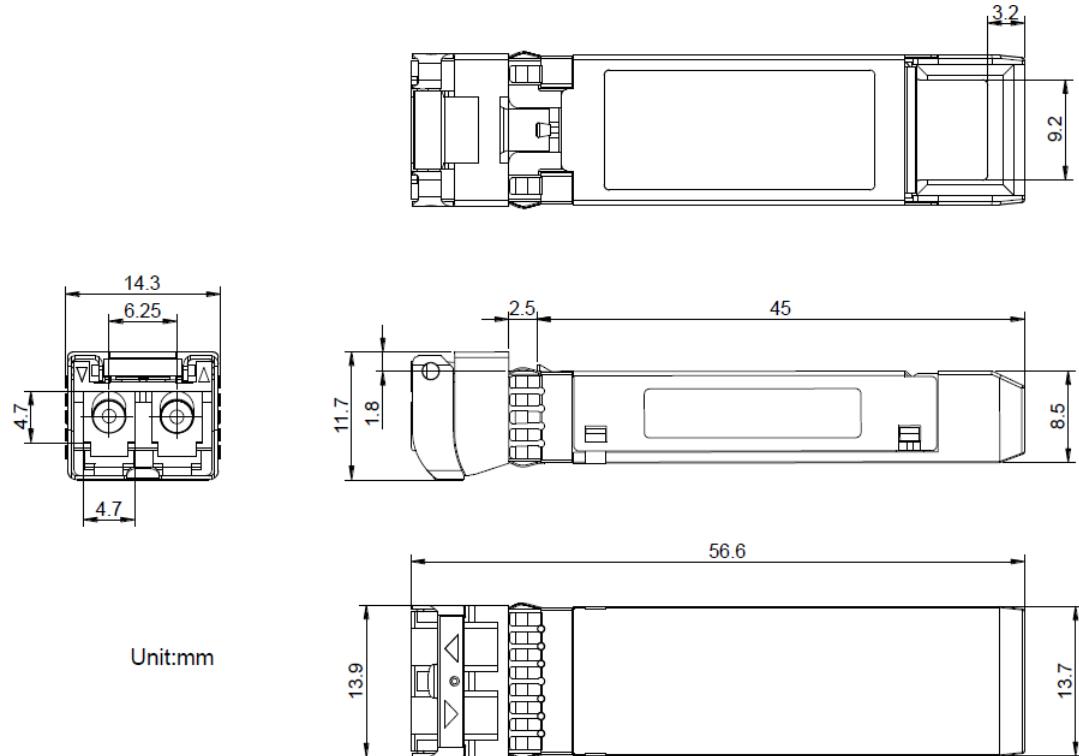

## EEPROM Information

EEPROM memory map-specific data field description is as below:

| 2 wire address 1010000X (A0h) |   | 2 wire address 1010001X (A2h) |   |
|-------------------------------|---|-------------------------------|---|
| 0                             | Serial ID Defined by SFP MSA (96 bytes) | 0                             | Alarm and Warning Thresholds (56 bytes)   |
| 95                            |   | 55                            | Cal Constants (40 bytes)                  |
| 127                           | Vendor Specific (32 bytes)              | 95                            | Real Time Diagnostic Interface (24 bytes) |
|                               |   | 119                           | Vendor Specific (8 bytes)                 |
|                               | Reserved, SFF8079 (128 bytes)           | 127                           |   |
| 255                           |   | 247                           | User Writable EEPROM (120 bytes)          |
|                               |   | 255                           | Vendor Specific (8 bytes)                 |

## About ProLabs

Our experience comes as standard; for over 15 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with over 90 optical switching and transport platforms.

## Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 400G while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

## Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure that you get immediate answers to your questions and compatible product when needed. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.



## Contact Information

### ProLabs US

Email: [sales@prolabs.com](mailto:sales@prolabs.com)

Telephone: 952-852-0252

### ProLabs UK

Email: [salesupport@prolabs.com](mailto:salesupport@prolabs.com)

Telephone: +44 1285 719 600